

GENERAL CHARACTERISTICS

Nominal Overall Diameter	306	mm
Nominal Voice Coil Diameter	38	mm
Magnet Weight	640	g
Flux Density.....	1.16	T

THIELE-SMALL PARAMETERS


Voice Coil DC Resistance	R_E	5.30	Ω
Resonance Frequency	f_s	78.0	Hz
Mechanical Q Factor.....	Q_{MS}	19.00	
Electrical Q Factor.....	Q_{ES}	1.15	
Total Q Factor	Q_{TS}	1.08	
Mechanical Moving Mass	M_{MS}	30.5	g
Mechanical Compliance	C_{MS}	138.0	$\mu\text{m}/\text{N}$
Force Factor	$B \times l$	8.40	Wb/m
Equivalent Acoustic Volume.....	V_{AS}	46.7	lt.
Maximum Linear Displacement ...	X_{MAX}	1.50	mm
Reference Efficiency	η_0	1.82	%
Diaphragm Area	S_D	491.0	cm^2
Losses Electrical Resistance.....	R_{ES}	90.0	Ω
Voice Coil Inductance @ 1kHz	L_E	0.58	mH

CONSTRUCTIVE CHARACTERISTICS


Magnet.....	Ferrite
Voice Coil Winding.....	Copper
Voice Coil Former.....	Epotex
Cone	Paper
Surround.....	Integrated Paper
Dust Dome	Non Treated Cloth
Basket	Pressed Sheet Steel

ELECTRICAL CHARACTERISTICS

Nominal Impedance.....	8	Ω
Rated Power (DIN 45573 - IEC 268.5)	70	W
Musical Power (DIN 45500)	140	W
Sensitivity @ 1 W, 1 m	96.3	dB

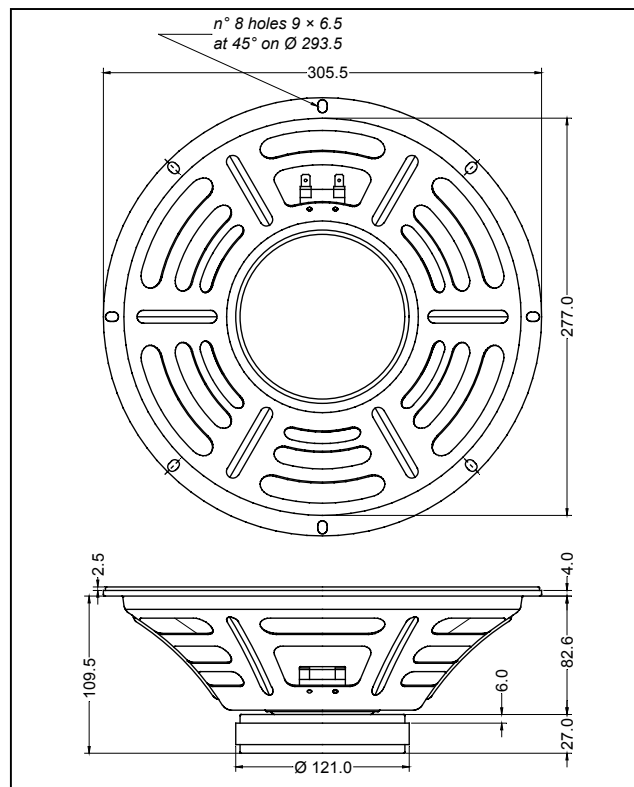

Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Impedance

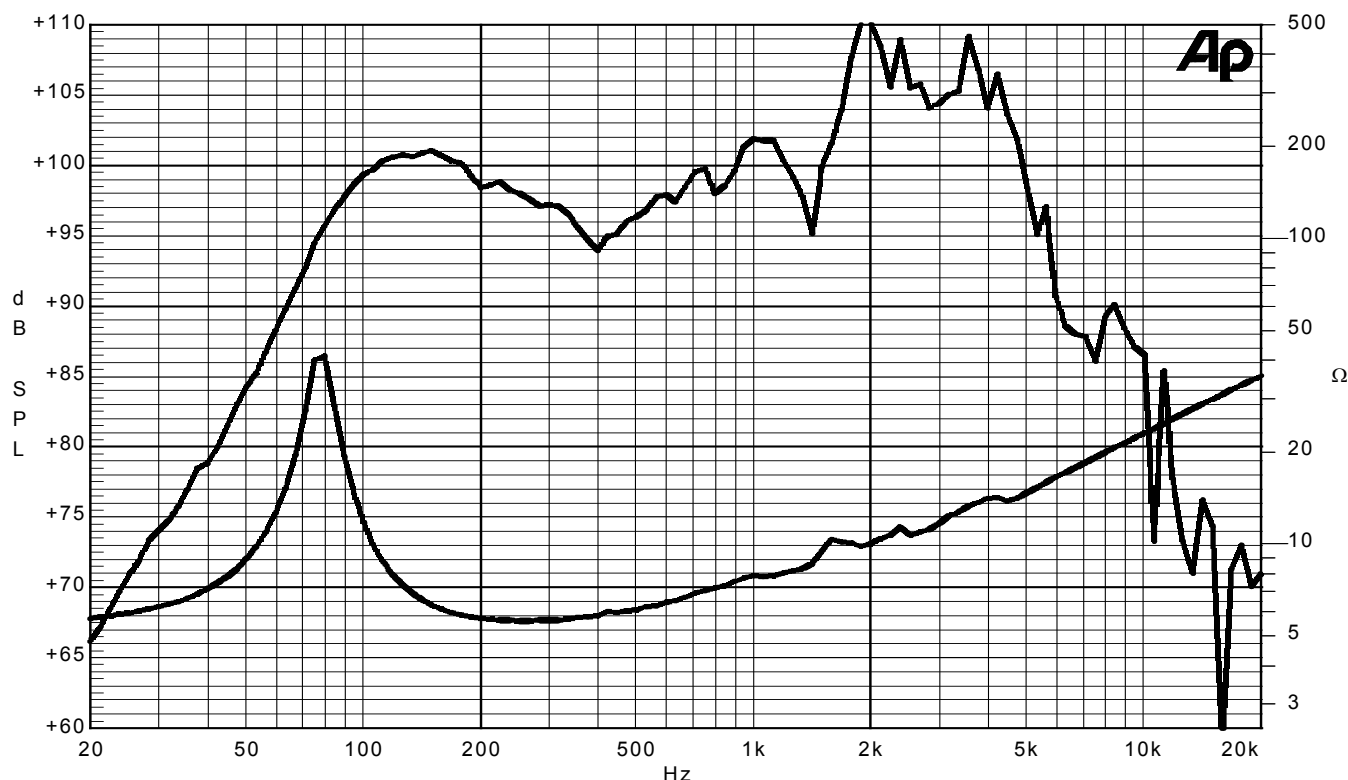

Due to continuing product improvement, the features and the design are subject to change without notice.

31/03/2005