

LOWS:
Fat

MIDS:
Aggressive

HIGHS:
Bright

OVERDRIVE:
Smooth

Sound Features:

Guitarist Description:


Tight low-end and clear, bright highs. It responds to overdrive distortion with a gritty edge.



Specifications	
Nominal Diameter	385 mm (15")
Nominal Impedance	8 Ω
Rated Power AES ⁽¹⁾	50 W
Continuous Program Power ⁽²⁾	100 W
Sensitivity @ 1W/1m	96.3 dB
Voice Coil Diameter	38 mm
Voice Coil Winding Depth	10 mm
Magnetic Gap Depth	8 mm
Flux Density	1.00 T
Magnet Weight	810 g
Net Weight	4.2 kg

Thiele & Small Parameters ⁽³⁾			
Re	6.20 Ω	Fs	73.0 Hz
Qms	6.80	Mms	54.7 g
Qts	1.11	Bxl	10.85 Tm
Cms	87 μm/N	Sd	754.8 cm ²
Vas	70.3 l	Le (1kHz)	0.93 mH

Constructive Characteristics	
Magnet	Ferrite
Basket Material	Pressed Sheet Steel
Voice Coil Winding Material	Copper
Voice Coil Former Material	Kapton
Cone Material	Paper
Surround Treatment	Yes
Surround Material	Paper - Integrated
Dust Dome Material	Solid Paper

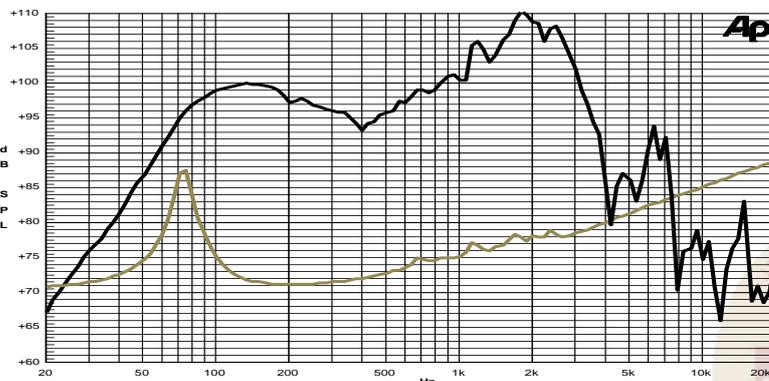

- Note:
- 1: Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Thiele & Small parameters measured with laser system without preconditioning test
 - 4: Drawing dimensions: mm
 - 5: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

